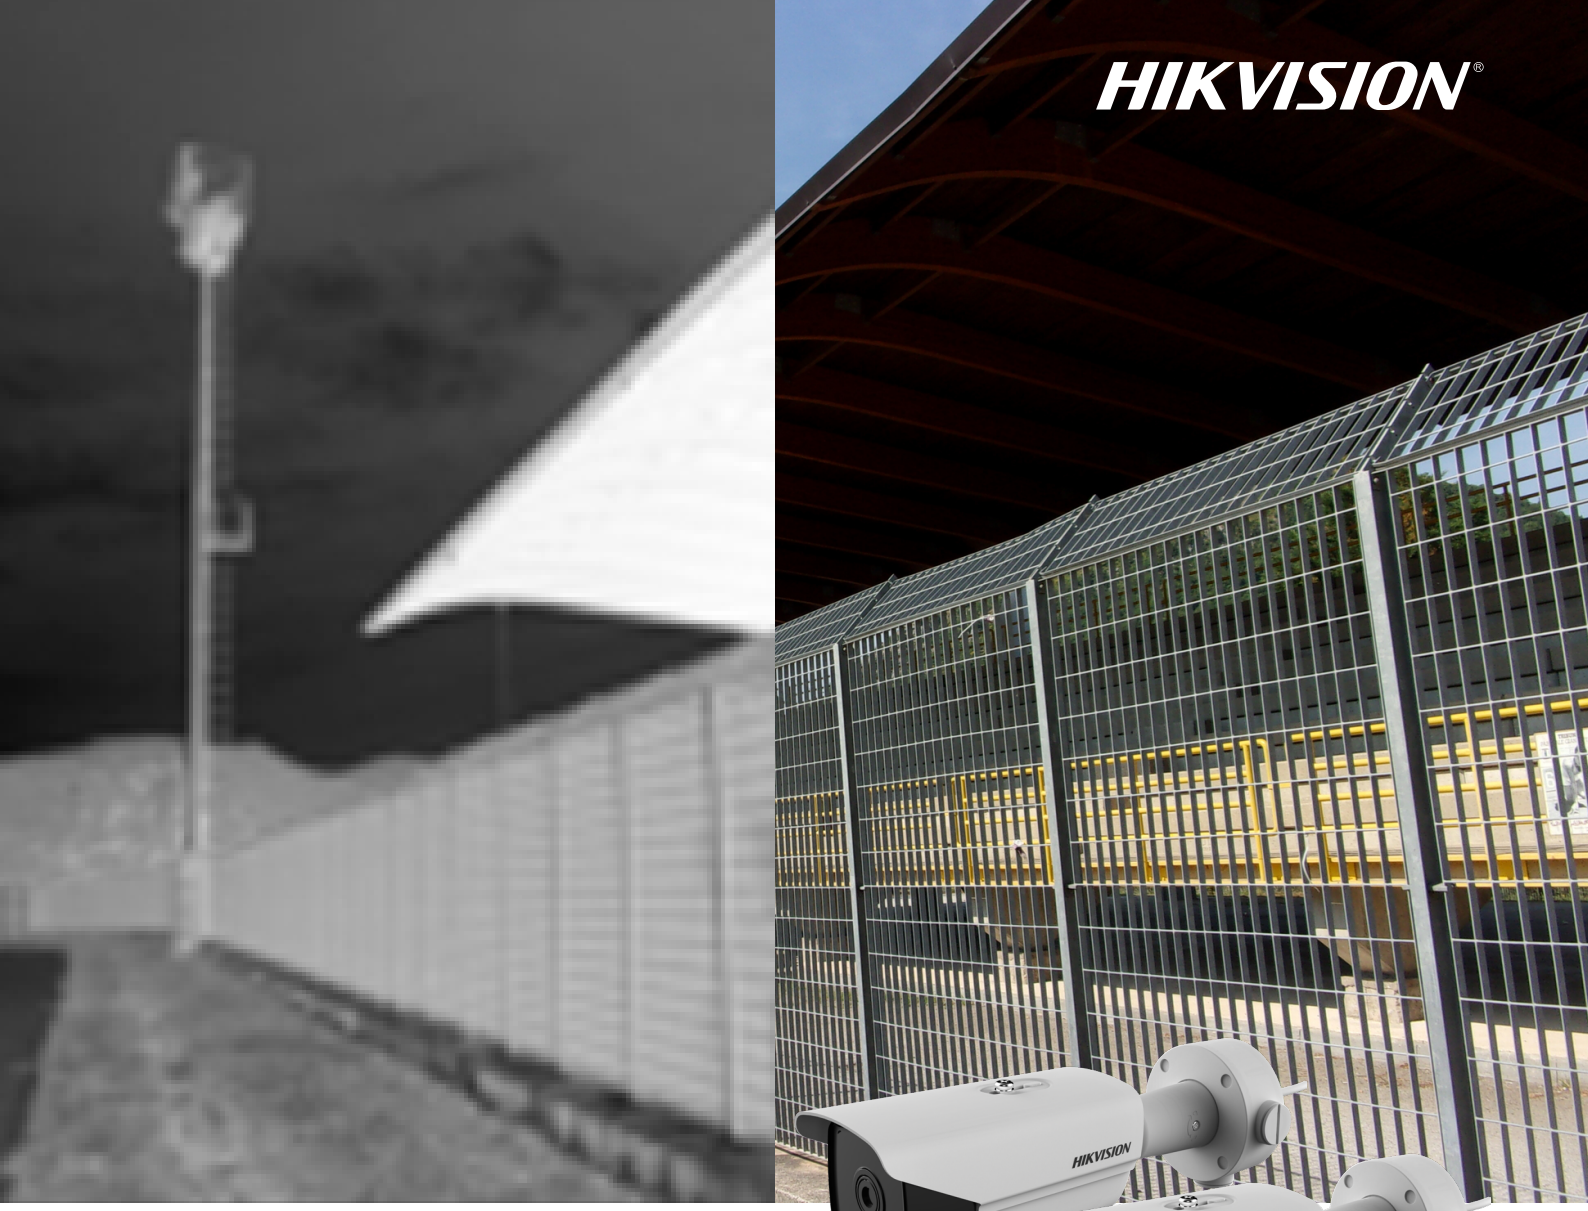

PERIMETER PROTECTION IN ALL WEATHERS

Performance Series Thermal Bullet Cameras

KEY FEATURES

Video Content Analytics with deep learning algorithms to reduce false alarms

Temperature exception alarm with visualized smart warning

Vigilant smoking detection helps to detect smoking behaviors in the first place

Picture-in-picture preview saves efforts on switching between optical and thermal channels

APPLICATION SCENARIOS

Villas

Communities

Car Dealerships

Factories

Parking Lots

Entrances

Warehouses

Substations

PARAMETERS

DS-2TD2117-3/V1
DS-2TD2117-6/V1

Performance Series
Thermal Bullet Cameras

DS-2TD2617-3/V1
DS-2TD2617-6/V1

Performance Series
Thermal Bi-spectrum Bullet Camera

- Resolution:
  - Thermal: 160 x 120 @ 25 fps, 17 μm (the resolution of the output image is 320 × 240)
  - Optical: 1920 x 1080 (DS-2TD2617 series only)
- Focal length:
  - Thermal: 3 mm / 6 mm
  - Optical: 4 mm / 6 mm (DS-2TD2617 series only)
- Hikvision sensor, NETD < 40 mk
- Video content analytics: Line crossing / Intrusion detection / Region entrance / Region exiting
- Temperature exception alarm (temperature measuring range: -20° to 150° C, accuracy: ±8° C)
- Smoking detection
- Supports bi-spectrum image fusion, picture-in-picture preview (DS-2TD2617 series only)
- Working temperature: -40° to 65° C (-40° to 149° F)
- IP67 ingress protection

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com